



SECURI-FLAME M FE180/PH90 UV

Fire resistant, halogen-free cable 300/500V



**COFERRO
CABLES**

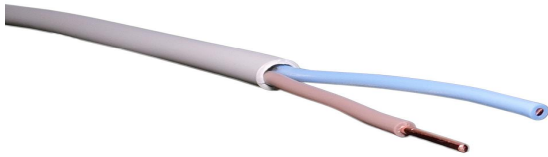

Technical data:

Temperature range:

Fixed installation: -30°C up to 80°C
During installation: -10°C up to 50°C

Operating voltage: U_o/U=300/500V

Test voltage: 2000 V AC

Insulation resistance (minimum):
100MΩ*km

Insulation resistance constant at 20°C: k_i > 1500 MΩ*km

Min. bending radius: 8 x Ø

Construction:

Cores: bare copper, conductor class 1 acc to: EN 60228, IEC 60228

Insulation: special ceramic silicone rubber

Core colors:

without green/yellow earth conductor (-O)

2-core – blue, brown

3-core – blue, brown, black

4-core – blue, brown, black, grey

5-core – blue, brown, black, grey, black

with green/yellow earth conductor (-J)

3-core – green/yellow, blue, brown

4-core – green/yellow, blue, brown, black

5-core – green/yellow, blue, brown, black, grey

Outer sheath: halogen-free polymer compound

Outer sheath colour: grey, RAL 7035

Application:

Halogen-free fire resistant cables are designed for installations in places where it is necessary to ensure operation of devices under fire conditions. They are recommended for emergency lighting installations, smoke extraction systems, alarm systems, signaling systems, sound warning and control systems, fire alarm signaling and automation and other safety ensuring circuits.

n x mm ²	Diameter [mm]	Cable weight [kg/km]	Cu [kg/km]
2x1,5	6,6	56	28,8
3G1,5	7,2	80	43,2
4x1,5	8,0	105	57,6
5G1,5	8,8	130	72
4x2,5	9,7	160	96
5x2,5	10,7	200	120
5G2,5	10,7	200	120

Coferro reserve the right to modify the specifications without prior notice

Tests:

- Flame test for a single insulated cable: EN 60332-1, IEC 60332-1
- Flame test for vertically-mounted bunched cables: EN 60332-3-22, IEC 60332-3 cat.A
- Emission of corrosive gases during burning: IEC 60754 - 2, PN-EN 50267
- Smoke density emission during burning : PN-EN 61034-2, IEC 61034-2
- Insulation resistance to long term fire exposure FE180: IEC 60331-11, IEC 60331-21, IEC 60331-23,
- Fire integrity function of cable installations (PH90): PN -EN 50200

Cable characteristics:

- fire resistant
- halogen-free
- flame retardant
- no corrosive gases (acidity pH > 4,3; conductivity < 10 uS/mm)
- low smoke emission (light transmittance over 60%)
- increased insulation resistance (FE180)
- fire integrity function (PH90)
- low fire load (calorific value)
- UV resistant



internal application



PN-EN 60332-1



PN-EN 60332-3
IEC 60332-3



halogen-free



insulation resistance
to fire 180min



PH90 fire
integrity function



low smoke emission



UV resistance

COFERRO CABLES A/S

Vesterlundvej 6, DK-2730 Herlev, CVR: DK-64103318, Phone: +45 4484 5555, www.coferrocables.dk